

LED Series - OLUX LED SPOT Light

IP65




OLUX LED SPOT M

OLUX LED SPOT S


Product Specification

- Lamp : Modul LED
- Housing : Aluminium alloy (ADC12), Color RAL9006 Coating
- Bracket : Aluminium alloy (ADC12), Color RAL9006 Coating
- Optical Visor : Aluminium alloy (ADC12), Color RAL9006 Coating
- Optical Cover : Tempered Glass, Clear



| Type | Dimension (mm) | | |
|-----------------|----------------|-----|-----|
| | W | L | H |
| OLUX LED SPOT S | 128 | 107 | 151 |
| OLUX LED SPOT M | 166 | 121 | 202 |

Light Distribution Curve

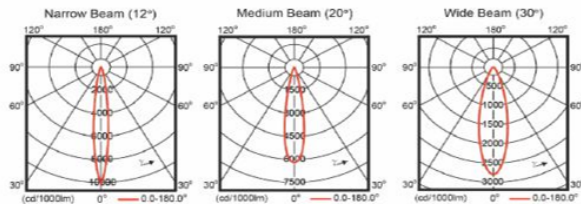

Equipment

| Type | Module power | Beam Angle | Total Flux | Light Output | CRI | Lifetime 90% survivals | Electrical |
|---------------------|--------------|-------------|------------|--------------|--------|------------------------|-----------------|
| | w | Degree | lm | K | min.Ra | hrs | V/Hz |
| OLUX LED SPOT S 830 | 7 | 12°/20°/30° | 430 | 3000 | 80 | 35.000 | 220-240 / 50-60 |
| OLUX LED SPOT S 740 | 7 | 12°/20°/30° | 600 | 4000 | 70 | 35.000 | 220-240 / 50-60 |
| OLUX LED SPOT S 757 | 7 | 12°/20°/30° | 700 | 5700 | 70 | 35.000 | 220-240 / 50-60 |
| OLUX LED SPOT M 830 | 12 | 12°/20°/30° | 830 | 3000 | 80 | 35.000 | 220-240 / 50-60 |
| OLUX LED SPOT M 740 | 12 | 12°/20°/30° | 1170 | 4000 | 70 | 35.000 | 220-240 / 50-60 |
| OLUX LED SPOT M 757 | 12 | 12°/20°/30° | 1300 | 5700 | 70 | 35.000 | 220-240 / 50-60 |