


RMI SAKA LED GIS



Product Specification

Lamp : LED Line (PHILIPS / OSRAM)
 Housing : Mild Steel
 Finishing Procces : Powder Coating

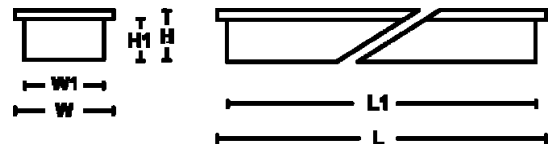

Benefit

- > 50% energy saving
- Improved temperature (Tc) range from 40°C to 80°C
- No special connection cable required

Type T8	Dimension (mm)					
	W	W1	L	L1	H	H1
SK-LED-GIS 2 X 18 W	319	298	633	611	70	80

Equipment

Type	Light Output	Lamp Wattage	System efficacy	Color Temp	CRI	Lifetime	Driver
	lm	W	lm/W	K	Ra	hrs	
CertaFlux LED Strip 2ft 1550 HV3	1550	10.7	135	3000 / 4000 / 6500	80	50.000	CertaDrive 27W 0.21A 130V 230V
CertaFlux LED Strip 2ft 2200 Hv3	2200	15.8	129	3000 / 4000 / 6500	80	50.000	CertaDrive 30W 0.29A 102V 230V
Basic Linear 1550 - 560	1550	10.4	141	3000 / 4000 / 6500	80	50.000	element LD 30/220-240/700
Basic Linear 2200 - 560	2200	14.4	141	3000 / 4000 / 6500	80	50.000	element LD 30/220-240/700

PT. SAKA AGUNG KARYA ABADI

Jl Raya Lingkar Timur No. 9 Kebonsari - Candi
 Sidoarjo - 61271 - East Java - Indonesia

E-Mail : marketing@saka-lighting.com
 Website : www.saka-lighting.com