

DOWNLIGHT Recessed OS SERIES



Round OS 4/R & OS 6/R



Round OS 4/R -D & OS 6/R - D




Square OS 4/S & OS 6/S



Square OS 4/S - D & OS 6/S - D

Product Specification

- Lamp : LED Philips, Osram
- Rim : Polycarbonate
- Reflector : Anodized Aluminium Reflector
- Heatsink : Aluminium

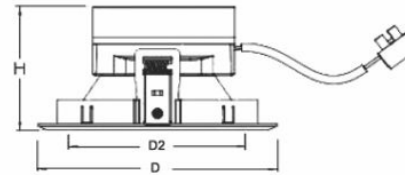

Type	Dimension (mm)			Hole Cut (mm)
	D	D2	H	
OS 4/R & OS 4/R-D	138	102	73 / 75	D125
OS 6/R & OS 6/R-D	171	132	83 / 85	D155
OS 4/S & OS 4/S-D	139	101	73 / 75	123 ²
OS 6/S & OS 6/S-D	171	131	83 / 85	153 ²

Equipment

Type	Lamp	Light Output	Lamp Wattage	Replaced Wattage	Color Temp	CRI	Lifetime	Driver
		lm	W	W	K		hrs	
OS 4/R & OS 4/R-D	PrevaLED Cube AC 1100	1100	11	1 x 18	3000 / 4000	80	50.000	Integrated
	Fortimo DLM Ease Select 1100	1100	10	1 x 18	3000 / 4000 / 6500	80	50.000	Integrated
OS 6/R & OS 6/R-D	PrevaLED Cube AC 2000	2000	18	2 x 18	3000 / 4000	80	50.000	Integrated
	Fortimo DLM Ease Select 2000	2000	18	2 x 18	3000 / 4000 / 6500	80	50.000	Integrated
OS 4/S & OS 4/S-D	PrevaLED Cube AC 1100	1100	11	1 x 18	3000 / 4000	80	50.000	Integrated
	Fortimo DLM Ease Select 1100	1100	10	1 x 18	3000 / 4000 / 6500	80	50.000	Integrated
OS 6/S & OS 6/S-D	PrevaLED Cube AC 2000	2000	18	2 x 18	3000 / 4000	80	50.000	Integrated
	Fortimo DLM Ease Select 2000	2000	18	2 x 18	3000 / 4000 / 6500	80	50.000	Integrated