


IP 20




Product Specification

- Lamp : Philips / Osram / Global Led / Free Led
 TL-D 18W - 36W or TL-D 14W - 28W
 TL Led 9W - 18W
- Driver : Electronic Ballast / Conventional Ballast
- Housing : Rolled Steel
- Reflector : Aluminium Optic Mirror
- Finishing : Powder Coating
- Available : Saka Platinum, Saka Premium, Saka UL

Light Distribution Curve

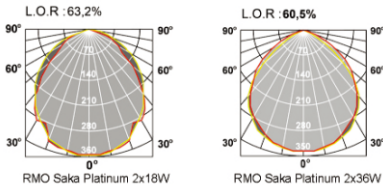

Dimension (mm)

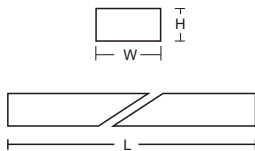

Type T5 RMO-SK-PLT	W	L	H	Type T8 RMO-SK-PLT	W	L	H
2 x 14 W	245	595	60	2 x 18 W	245	635	60
3 x 14 W	372	595	60	3 x 18 W	372	635	60
4 x 14 W	495	595	60	4 x 18 W	495	635	60
2 x 28 W	245	1195	60	2 x 36 W	245	1245	60
3 x 28 W	372	1195	60	3 x 36 W	372	1245	60
4 x 28 W	495	1195	60	4 x 36 W	496	1245	60